


OIL & GAS INDUSTRY

Machine tools



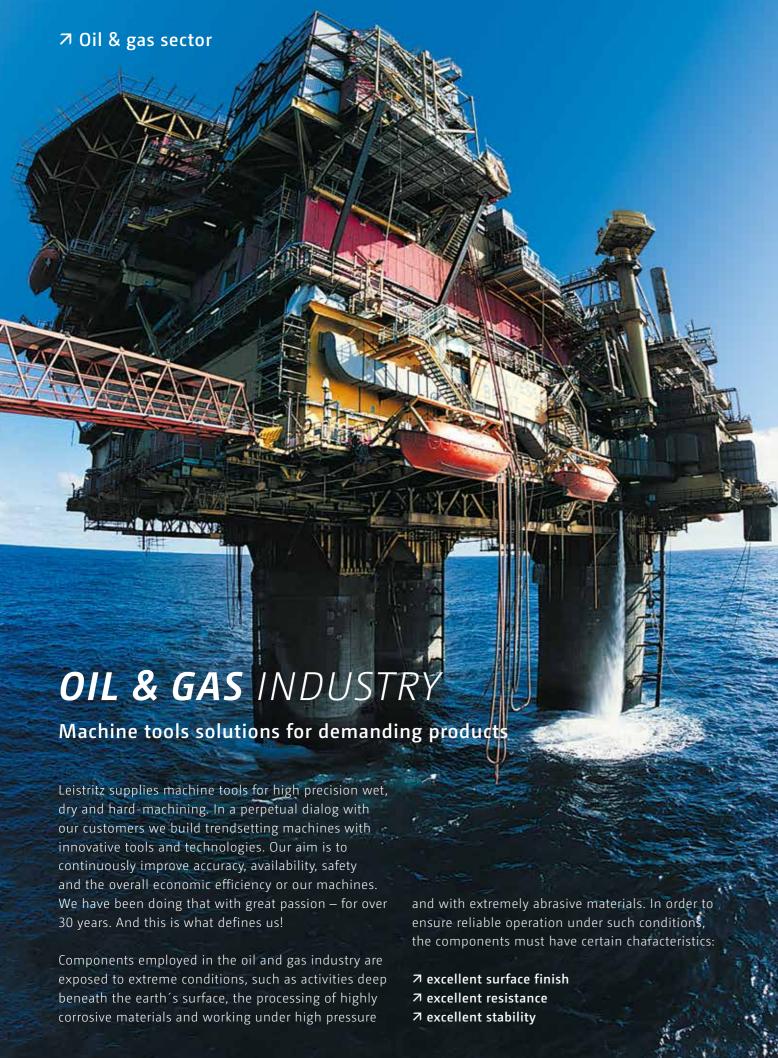

Our design and manufacturing specialists have developed a machine series that is tailored to meet the high requirements of the oil and gas industry. From oil drilling to oil production, we are a competent partner delivering tooling and machining solutions from

a single source to meet the high demands of our customers in the oil and gas industry.

We supply machine tools for the right process to manufacture diverse parts used in the oil and gas sector:

rotors



process: milling, hobbing and polishing

→ internal profiles, e.g. in stators, components for downhole pumps



process: keyseating

→ eccentric screws



process: whirling/peeling


→ programming and quality control



process: software

>>> Leistritz has been a strong partner to the oil and gas industry for years. <<

LEISTRITZ PRODUCTION TECHNOLOGY

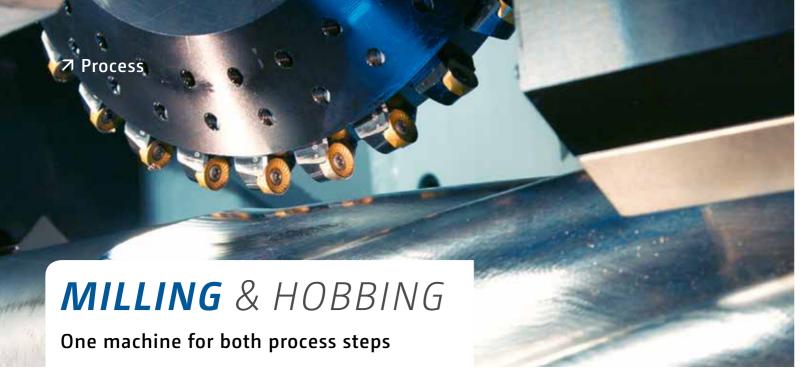

If the task is processing materials that are difficult to machine, such as those used for rotors in the oil and gas industry, then precision milling is of the utmost importance. Here, high-quality surfaces and profile accuracy are what counts.

Leistritz offers with its LWN 300 PM (Power Mill) a solution for side milling and hobbing on one machine. The milling cutters are arbor mounted to a Ø 50 mm spindle with an outboard support by a counter bearing, to achieve the high rigidity. This superior support produces best surface finishes and a high tool life. This insures rigidity while maintaining fast tool change-over times. Furthermore, the Power Mill has a continuous diagonal hob shift, which utilizes

the entire hob face during the cutting of a rotor to evenly distribute tool wear. A complete rotor can be hobbed without the frequent stops for measuring or the exchange of inserts.

BENEFITS OF LWN 300 PM:

- milling and hobbing on one machine
- unmanned machining of one rotor is possible regardless of work piece length
- easy conversion of existing programs to the coordinate system of the LWN 300 PM
- all machine axis are CNC controlled (e.g. automatic determination of machining height of steady rests)

LWN 300 PM

Work piece diameter	25 – 220 mm
Work piece length	



POLISHING PROCESS

Highest possible surface quality

An abrasive belt is applied to the workpiece in order to smooth its surface and prepare it for further processing or for finish it after coating. This finishing process achieves the highest possible surface quality and ensures the perfect interaction between the rotor, stator and housing.

These challenges are made for the Leistritz polishing machine LWN 250 PL, which is designed for the high demands on profile geometry.

LWN 250 PL

Work piece diameter	25 – 220 mm
Work piece length	

BENEFITS OF LWN 250 PL

- → single and multi-lobe polishing on one machine
- → auto shutdown in case of belt breakage
- user-friendly operator interface
- → belt speed of up to 40 meters/second
- high positioning accuracy
- → in-cycle adjustment of belt pressure
- facilitates polishing of tungsten carbide coated material





I FISTRITZ



The whirling/peeling unit consists of a ring with inward facing inserts. The work piece is located in the center of the whirling/peeling ring. While the ring rotates, the whirling/peeling unit is fed along the work piece length. The profile is created by the inter-

polation of the whirler feed in combination with workpiece rotation.

Leistritz provides high-quality machine tools for whirling/peeling.

LWN 300 HP

	LWN 300 HP	LWN 190 HP
Work piece diameter		20 – 125 mm
Work piece length	8,000 mm	6,000 mm



MACHINE BENEFITS:

- → high rpm
- → centering steady rests with adjustable clamping force for different work piece Ø
- → rigid and low vibration clamping of work piece
- → pre-adjustment of cutters and holders with adjusting device, accuracy ~ 0.01mm
- user-friendly operation and interactive programming
- comprehensive protection of all guideways and drive units




Work piece diameter	10 – 80 mm
Work piece length	6.000 mm



7 Process




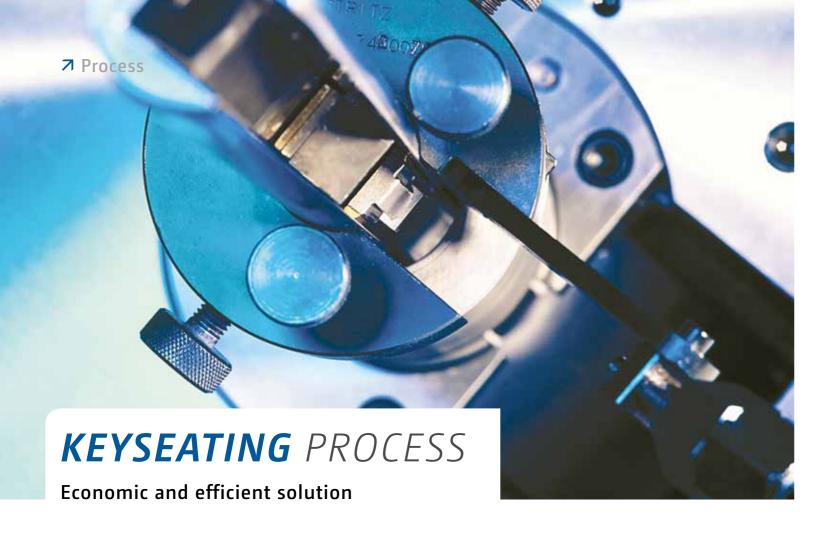

For the production of internal profiles such as in stators, components for downhole pumps, etc. key-seating machines are used. The keyseating process cuts a keyway in stepwise manner. A cutter is pulled vertically with a continual stroke movement along

the bore, combined with a horizontal thrust motion. The thrust is delivered after each stroke by a feed bar that thrusts the cutter in steps between the cutter guide bar and cutter bar.

Basic function: keyseating

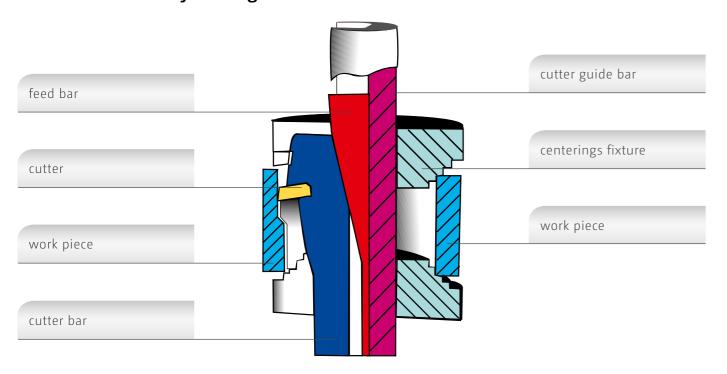

Leistritz offers several keyseating machines: the Polymat and Polyjet series. In order to further improve efficiency,

the machines can be equipped with automatic loading and indexing devices for unmanned production.

POLYMAT CNC

	70 CNC	100 CNC	125 CNC
Work piece diameter			
Groove width		100 mm	125 mm

POLYMAT 50

Work piece diameter	100 - 300 mm
Work piece length	
Groove width	50 mm





MACHINE BENEFITS:

- workpiece and tool are clamped into a single unit, resulting in long tool life and optimized high process efficiency
- very wide and long keyways can be cut (length up to 2,000 mm and width up to 150 mm)
- low machine space requirement, even for large keyway lengths or widths
- highest precision as tool is guided over entire keyway length
- **¬** gentle cutting for workpiece (no warp)



8 LEISTRITZ PRODUCTION TECHNOLOGY

SOFTWARE

1. Transfer of existing data to

Leistritz CAE


User-friendly programming and quality control

To round up the Leistritz turnkey solution the customer is supported by the unique Leistritz Rotor CAE. This software enables our customers to run the machine with high flexibility for a demanding market.

Data input screen | Contract and and A2 2 (INESSE) | Insuface | I

LEISTRITZ ROTOR CAE:

- → stand-alone software solution
- → easy programming of rotor profile
- → guided programming
- → generating of CNC program
- → easy transfer to CNC control
- → graphic data display

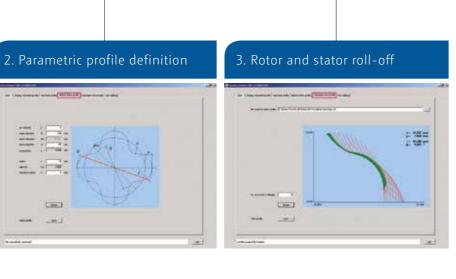

CUSTOMERS BENEFIT FROM: → integrated measuring device measurement directly after machining or between machining steps

Measurement

>>> The Leistritz software covers the requirements of low batch sizes with high profile accuracy. <<

no need to remove workpiece from machine for

→ fast measurement (result within 3 minutes)

→ corrected profile can easily be transferred to


→ highest profile accuracy

machining process (at the push of a button)



PRODUCTION TECHNOLOGY

Available for you - all over the world

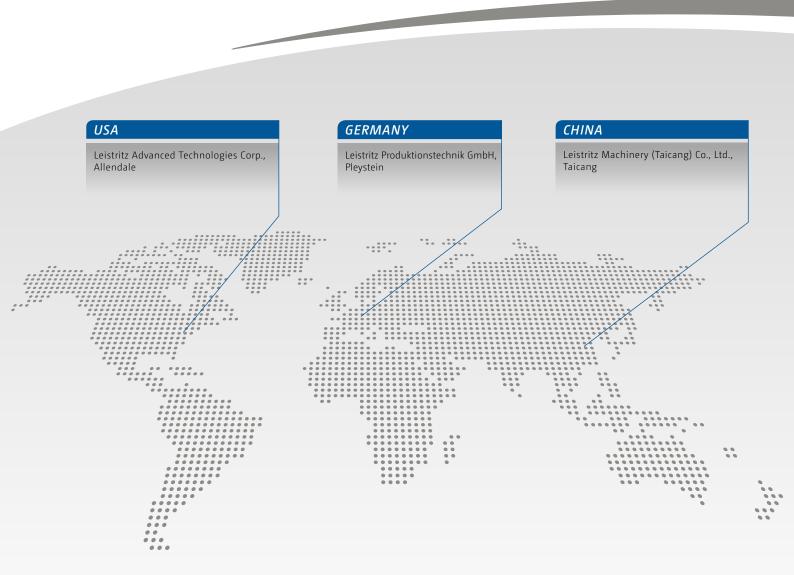

7 Leistritz Produktionstechnik GmbH | Leistritzstr. 1-11 | 92714 Pleystein | Germany Tel.: +49 9654 89- 0 | produktionstechnik@leistritz.com